

400 SERIES POWER SUPPLY/CHARGERS

Single Output

AL400UL

- UL Listed in the U.S. and Canada for Access Control.
UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
CSFM Approved.
 - 4 amp @ 12VDC or 3 amp @ 24VDC.
 - Single Class 2 Rated power-limited output.
 - AC fail and low battery supervision.
- Enclosure dimensions: 12.25"H x 7.5"W x 4.5"D

AL400ULX

- UL Listed in the U.S. and Canada for Access Control.
UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
CSFM Approved.
 - 4 amp @ 12VDC or 3 amp @ 24VDC.
 - Single Class 2 Rated power-limited output.
 - AC fail, low battery and battery presence supervision.
 - Fits two (2) 12VDC/7AH batteries.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

* For red enclosure add suffix "R" to model number.


64

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.



MEA
Approved

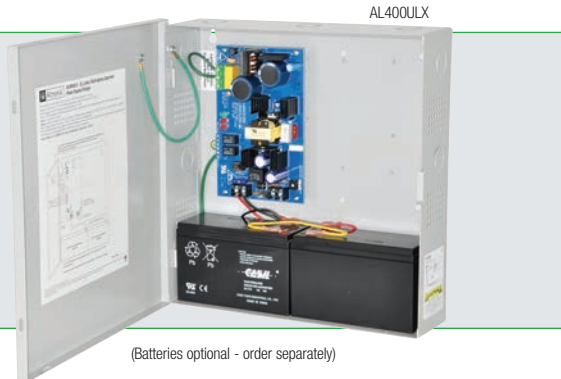

(Batteries optional - order separately)